



TOP VIEW
SCALE 1:10

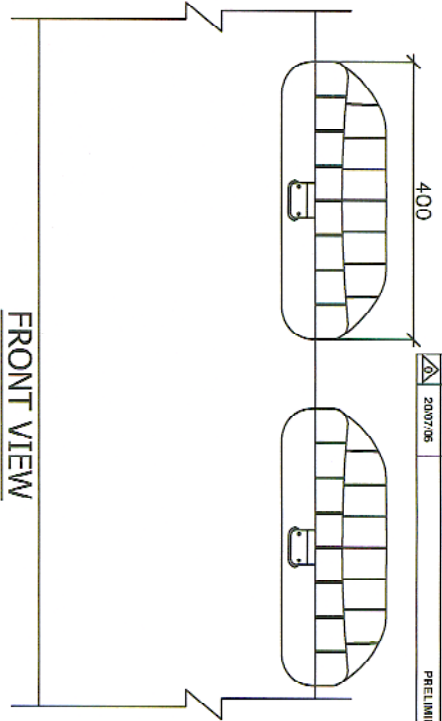


FRONT VIEW
SCALE 1:10

BUCKET SEATS, BRIGHT ANATOMICAL SHELL INJECTED HIGH IMPACT PLASTIC, ANTI-STATIC & UV TREATED

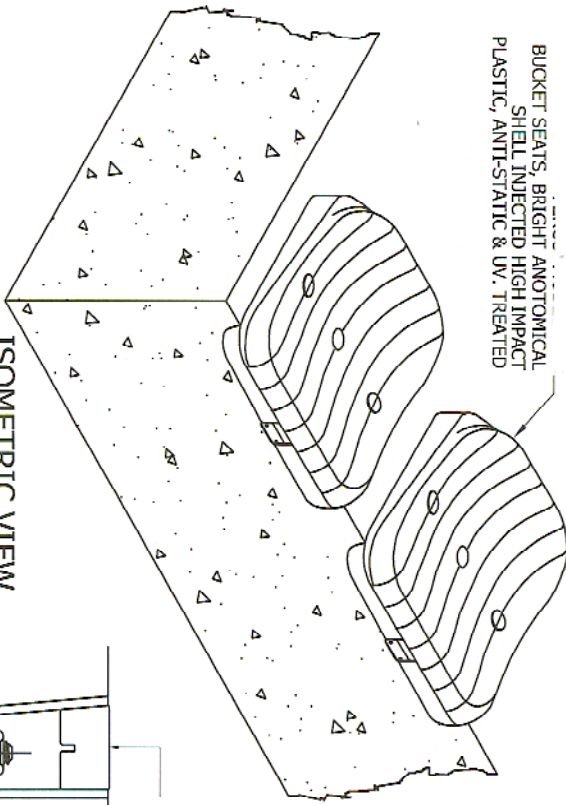


ISOMETRIC VIEW
NTS

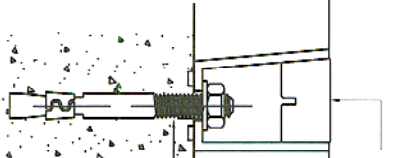

PLASTIC SNAP-IN COVER
2 Nos./SEAT

PROPOSED 2 Nos. 'HILTI' M8x92L HSA STUD ANCHOR CARBON STEEL, ZINC PLATED FINISHED (BY OTHERS)

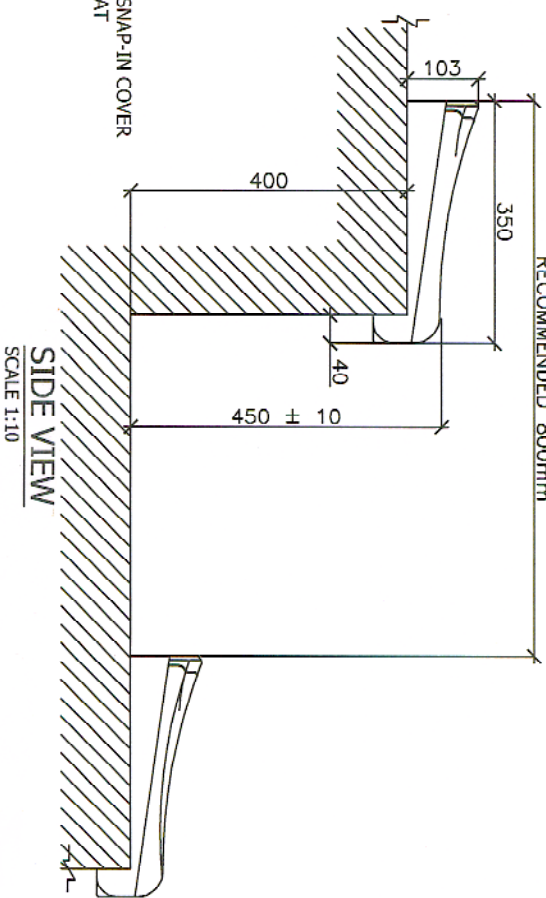

SIDE VIEW
SCALE 1:10

CONCRETE MUST BE A MINIMUM THICKNESS OF 75mm AND A MINIMUM OF 20 N

WOOD MUST BE A MINIMUM THICKNESS OF 38mm

FLOOR TOLERANCE LEVEL: ±4mm OVER 3000mm

SECTION THRU A
NTS

VUE DIMENSIONS